

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 60-179857

(43)Date of publication of application : 13.09.1985

(51)Int.Cl.

G06F 12/08
G06F 12/16

(21)Application number : 59-036805

(71)Applicant : FUJITSU LTD

(22)Date of filing : 28.02.1984


(72)Inventor : SEKI KAZUHISA

(54) CONTROL SYSTEM OF CACHE DEVICE

(57)Abstract:

PURPOSE: To return a cache device to a state immediately before the disconnection of a power supply and to drive instantaneously the device by transferring data existing in the cache memory at the OFF of the power supply from a disc to the memory at the rise of the cache device.

CONSTITUTION: Data having high frequency are stored in the cache memory 25 and addresses on a disc device 3 in which these data exist are registered in a control table 22. If a power supply 7 is turned off under said status, a backup power supply is turned on by a disconnection signal to protect information in a control table 2. At the time turning on the power supply again, address information registered in the control table 2 is read out by a microprogram from an MPU21 and the disc device 3 is accessed by using a control interface 28, an interface circuit 23 and a transfer circuit 24 to restore the corresponding data in the cache memory 25.

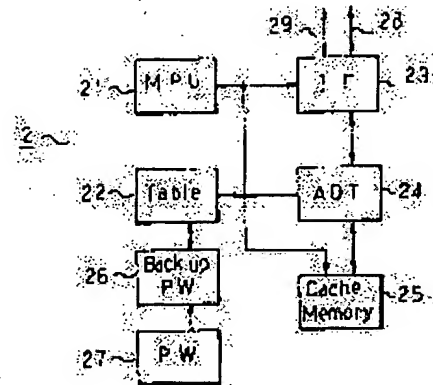

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]